





T22P is the ideal IP business phone to equip the office for reliable, intensive telephone based business without incurring extravagant expense. Productivity driven, this best selling mid range phone is a robust, hard working favourite.



T22P

Network Features

SIP v1(RFC2543), v2(RFC3261) 3 User accounts NAT Transverse: STUN mode IP Assignment: Static/DHCP/PPPoE In-Band DTMF, Out-of-Band DTMF, SIP Info Proxy mode and Peer-to-peer SIP link mode TFTP/DHCP/PPPoE client Telnet/HTTP server DNS client NAT/DHCP server Support VLAN, QoS PoE optional

Voice Features

Wideband Codec: G.722, voice spectrum between 50-7000Hz Narrowband Codecs: G.711, G.726, G.723.1/iLBC, G.729AB and GSM VAD, CNG, AEC, PLC, AJB, AGC Full-duplex hands-free speakerphone

Telephony Features

Call Hold, Call Waiting, Call Transfer, Call Forward Caller ID, Call List, DND, Redial, Flash 3-way Conference, Speed Dial Personal Ring Tone, Voicemail Volume Adjustment, Mute, Speakerphone

IP PBX System Integration

Dial Plan, Dial-now, Paging Downloadable enterprise phonebook Call Park, Call Pickup, Distinctive Ringtone Auto-answer, intercom

Config, Upgrade and Usage

Language Customization Support Firmware Upgrade: TFTP/Console/Autoprovision Auto-provision: TR069 Optional Direct IP call without SIP proxy Dial number via SIP server Dial URL via SIP server

Security

Secure RTP Digest authentication using MD5/MD5sess Secure configuration file via AES encryption

Physical Features

TI Titan Chipset LCD: 132x64 with blue backlit 3 programmable keys, 4 text-sensitive keys 23 hard keys, 2 indication LEDs Headset port: RJ9 Network Interface: 2xRJ45 10/100M ports Dimension: 275 x 220 x105 mm Net Weight: 1.22 kg Power adapter: Input: AC 100~240V Output: DC 5V/1A Operating humidity: 10~95%

Package Features


Qty per Carton: 10 Carton Weight: 13.3 Kgs Carton Dims: 565 x 570 x 255 mm

Storage temperature: up to 60 C

Certifications WEEE





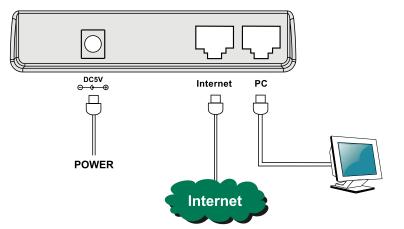



Yealink (UK) Ltd, Pennine House, Salford Street, Bury, Lancashire, BL9 6YA, United Kingdom Tel: +44 (0)161 763 2060 Email: sales@yealink.co.uk Web: www.yealink.co.uk

Due to our policy of continuous product improvement, all specifications may be subject to change without prior notice