


Extend the range of your DECT Phone Easy and Simple

- Up to 6 repeaters per base station
- Automatic handover of calls between cells
- 2 simultaneous calls per repeater
- Automatic registration method
- Supports W52P
- Additional coverage between base station and handset, up to 50m indoors and 300m outdoors



The Yealink DECT repeater can be deployed when there is a desire to extend the range of the W52P. The repeater can also be utilised wherever there is a need to increase limited coverage or improve reception in remote areas.

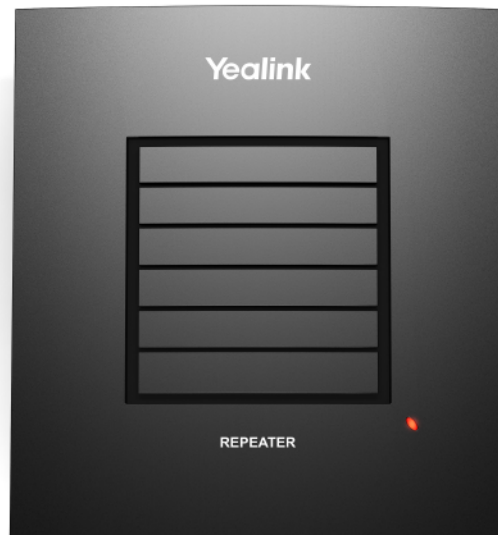

Normal Range



Extended Range

Up to 6 repeaters per base station

GENERAL FEATURES

- > Extends DECT coverage
- > Worldwide DECT support
- > Supports automatic handover of calls between cells
- > Handles 2 active cells simultaneously
- > Up to 6 repeaters per base station
- > Automatic registration method
- > Manual registration method
- > Size: 120 (W) x 35 (D) x 135 (H) mm
- > Wall mountable
- > Input: 230 V/50-60HZ/45mA
- Output: 5V/300mA
- > LED INDICATOR

FREQUENCY/COVERAGE

- > Frequency bands coverage:
DECT, EU/AU/NZ & US/CA
- > Additional coverage between base station and handset, up to 50m indoors and 300m outdoors
- > Receiver sensitivity: -92dBm
- > 2 internal omni-directional antennas
- > Support for external antennas using SMB connectors

STANDARDS/APPROVALS

- > Designed in accordance with the Digital Enhances Cordless Telecommunications (DECT) standard
- > Compliant with:
 - TBR6, TBR22 (Generic Access Profile, GAP)
 - ETS 300 700 - ETSI Wireless Relay Station Specification

